




# M219 4 x 4 Matrix Switch M Module

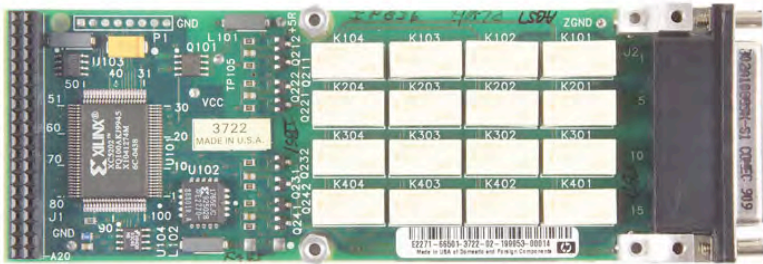

The M219 (formerly Agilent E2271A) provides 16 independent latching DPST switches Configured as a 4 x 4 matrix. These two wire switches have maskable interrupts that occur when the requested relay movements have been made. The module also has a FIFO for storing up to eight relay operations. This M Module is useful when instrument matrix switching is needed in your system.

## Specifications:

### Inputs:

#### Maximum Voltage (terminal to terminal or chassis)\*\*

DC:	60V/200V
AC rms:	48V/125V
AC peak:	68V/175V

#### Maximum Current (non-inductive) Per Switch/Per Module:

DC:	2A/8A
AC peak:	2A/8A

#### Maximum Power Per Switch/Per Module:

DC:	50W/200W
AC:	50VA/200VA

### DC Characteristics\*\*:

Thermal Offset:	<3_V (typical)
Contact Resistance:	<0.3_
Insulation Resistance:	10E8 _

\*\* See manual for conditions

### AC Characteristics:

Bandwidth (-3dB):	>10 MHz (typ)
Crosstalk (typical)	
<100 KHz:	<-64 dB
<1 MHz:	<-44 dB
<10 MHz:	<-24 dB

#### Closed channel capacitance:

Hi-Lo:	<40 pF (typical)
Hi-Chassis:	<60 pF (typical)
Lo-Chassis:	<60 pF (typical)

### Typical Relay Life at Rated Load:

10E5 operations

### Time to close or open:

8 msec

### Connectors:

44 pin DSUB (Female)

### Temperature:

Operating:	0°C to 55°C
Storage:	-40°C to 75°C

### Power:

+5V @ 0.2 A

## M Module Compliance

Complies with ANSI/VITA Std 12-1996 for single-wide M Modules.

Data Transfers	8 bit
Interrupts	INTC

Compatible with VXI, VME, PCI, PXI, CPCI & Ethernet Carriers

## Applications

- LF Signal Switching
- Instrument Matrix with Kelvin switching

## Ordering Information

Part Number 11029540-0001

## Additional Information

User Manuals for C&H carriers and this module can be found on our website at www.chtech.com.